(12) **UK Patent Application** (19) **GB** (11) **2 193 025** (13) **A**

(54) **Multi-size reel symbols**

(57) Slot machine display reels are provided with a plurality of symbols 13 occupying differing proportions of the circumference of the reel, such that those symbols which require greater prominence, such as a jackpot, occupy a larger proportion of the circumference. Associated with each reel is a spinning mechanism, such as stopper motor 11, which is able to position any symbol on the reel centrally within an associated display window, irrespective of the size of that symbol, by taking the size of the respective symbol into account when determining the stopping position.

FIG.1

FIG.2

FIG.1

FIG.2

FIG.3

FIG.4

RANDOM NUMBER GENERATOR
CHOOSES SYMBOL NUMBER
TO BE DISPLAYED ON REEL.

100

LOOK UP TABLE TO DETERMINE
THE NUMBER OF MOTOR
PULSES REQUIRED TO STOP THE
REEL FROM THE INDEX
POSITION TO THE CHOSEN
SYMBOL POSITION.

110

STEP REEL TO THE INDEX
POSITION AFTER A SUITABLE
NUMBER OF REVOLUTIONS
AND STEP THE NUMBER OF
STEPS DETERMINED BY THE
LOOK UP TABLE.

120
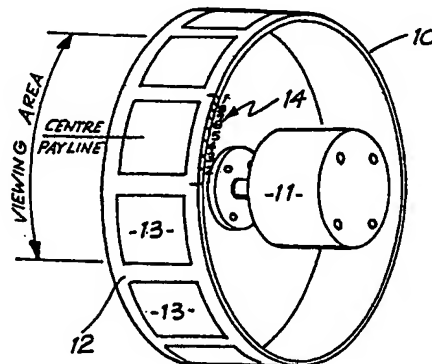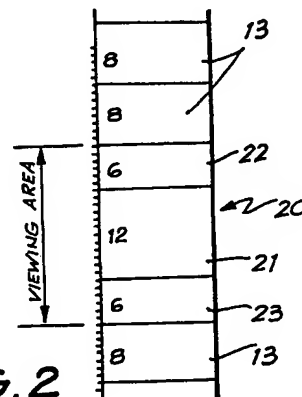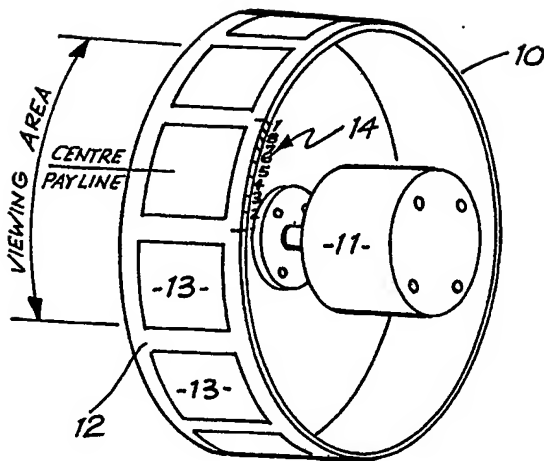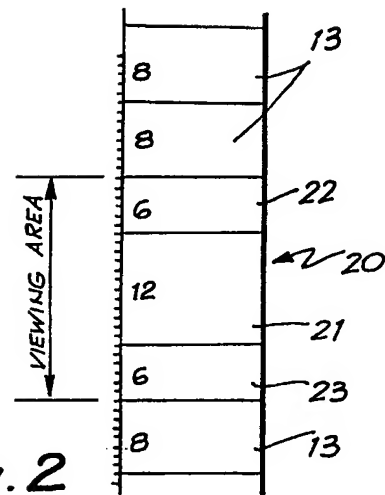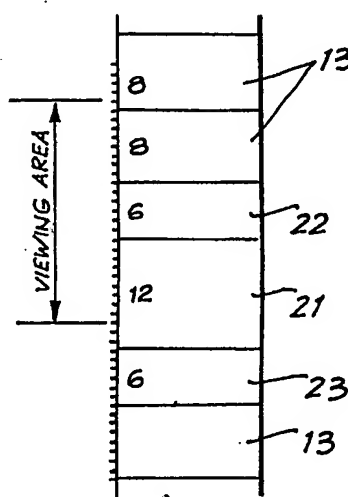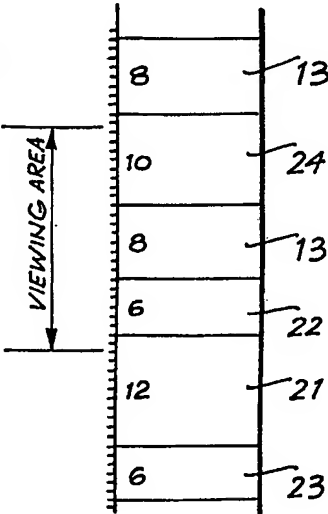
FIG.5

FIG.7

FIG.8

FIG.6

FIG. 9

FIG. 10

FIG. 11

SPECIFICATION

Multi-size reel symbols

5   The present invention relates to gaming machines of the type known as poker machines, fruit   5
machines or slot machines and in particular the invention relates to improvements in poker
machine display reels.
     Historically, symbols on a particular sized poker machine reel have always been identical in
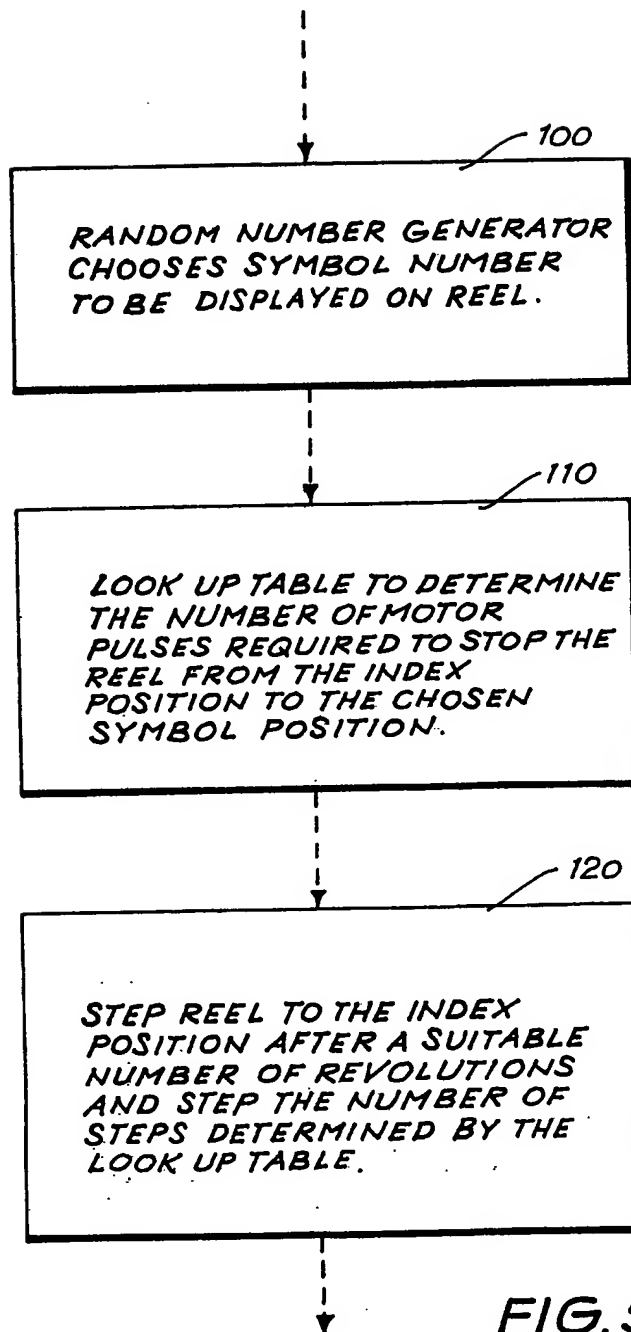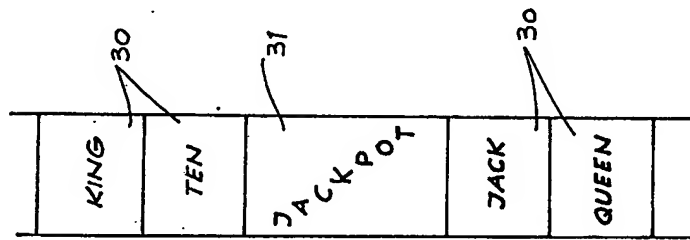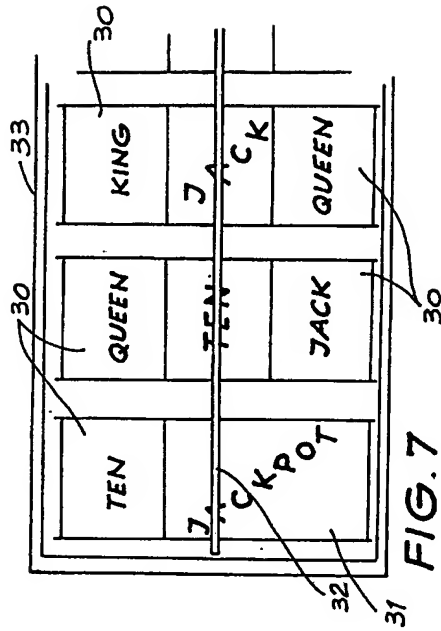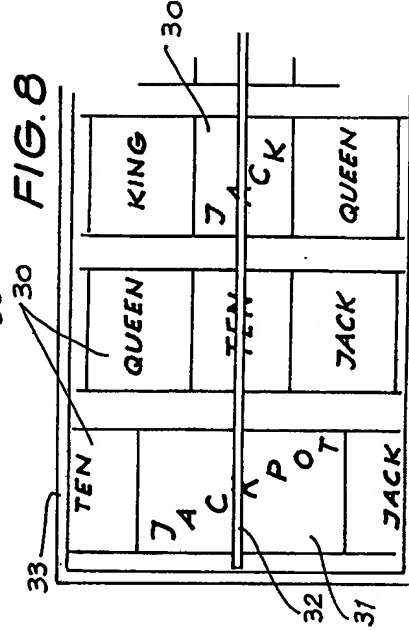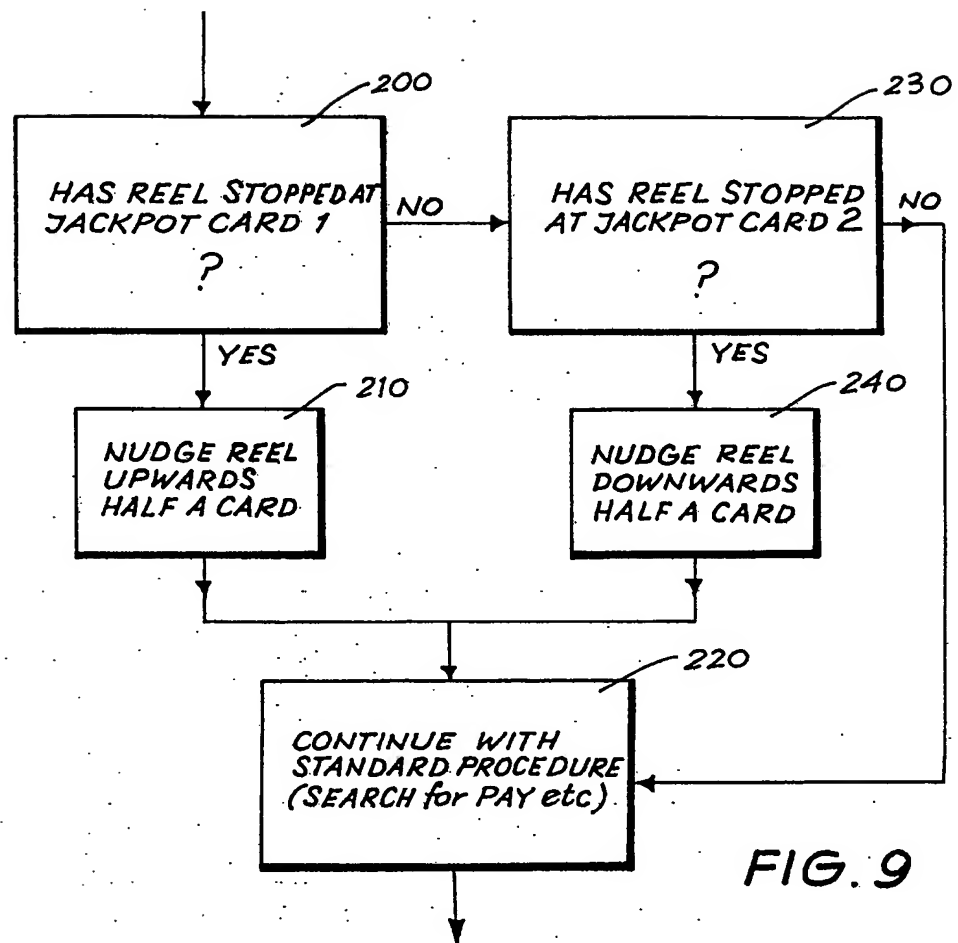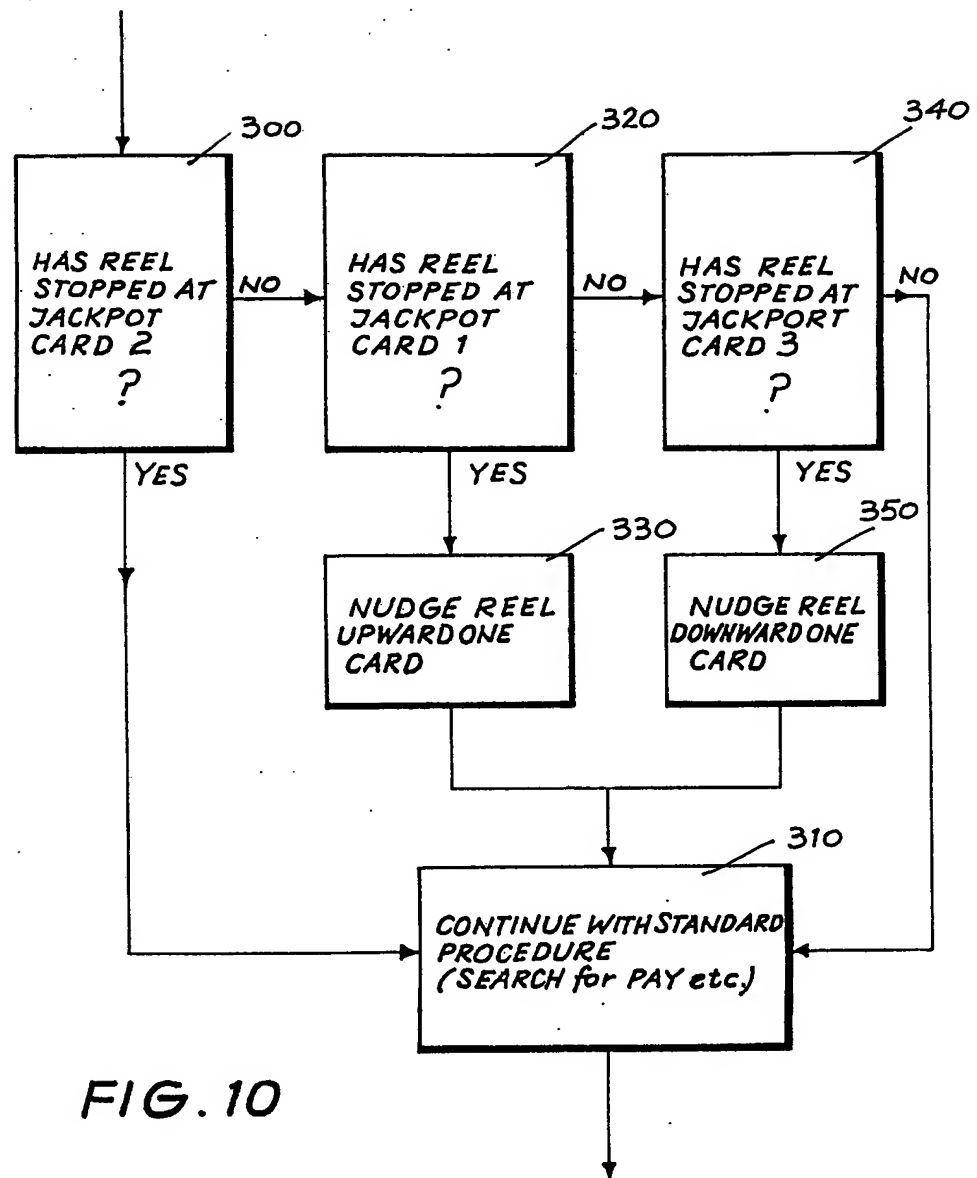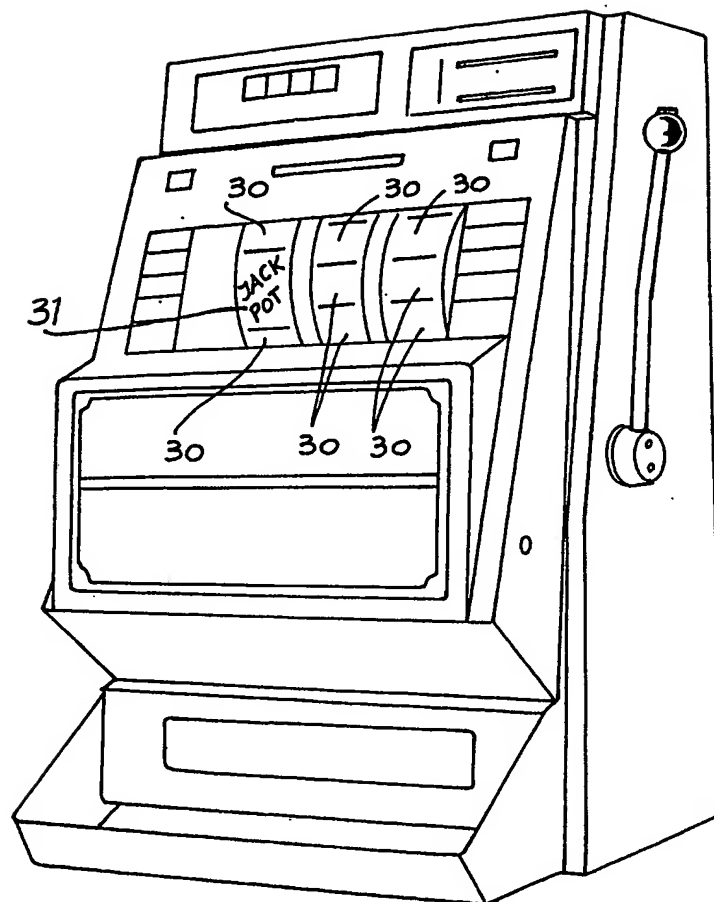height, or more specifically the space allocated to each symbol has been equal, irrespective of
10   the size of the symbol contained thereon. For example, the area allocated for an "orange"   10
symbol is the same size as that for a "bar" symbol even though the picture for the bar symbol
is not as high as that for the orange. In the past, the space allocated to each symbol, which is
generally referred to as a "card", has been a function of the number of stops on the reel and
the provision of equal spacing for each symbol has been dictated by the mechanical nature of
15   the reel stopping mechanism. Further it has been the practice in the past to allocate one symbol   15
for each stopping position of the reel. However, this limitation does not apply to stepper motor
driven machines where the final reel position is predetermined before the spinning of the reel
and where the stepping motor is able to step the reel in increments which are substantially
smaller than the height allocated to each reel symbol. Also, the possibility exists in conventional
20   machines to include symbols which occupy a space which is a multiple of the prior art symbol   20
space or card.
     The present invention consists in a reel for a poker machine display, said reel including a
cylindrical peripheral surface to which a plurality of indicia are applied, each of said indicia having
a symbol space within which the indicia is substantially centrally located, said symbol space
25   occupying a proportion of the circumference of the cylindrical surface which is different for   25
different indicia on said surface.
     The provision of symbols of different sizes around the periphery of the poker machine reel
allows the use of larger indicia for those reel positions which feature in larger pay outs, thereby
making it easier for the player to recognise those symbols.
30   In the case of stepping motor driven machines, the provision of indicia of different sizes also   30
has the additional advantage that it allows the implementation of poker machine reels on which
the number of indicia is not an integral sub-multiple of the number of pulses required to step
through a full revolution. For example, a stepping motor which is typically used to drive a poker
machine reel will be driven through one revolution by applying 200 pulses to the motor.
35   Therefore, if the reel is provided with 25 indicia, 8 pulses are required to step the reel by one   35
symbol position, however, if all symbols were spaced by an equal number of pulses, it would
not be possible to produce reels having 21, 22 or 23 symbols. In contrast, poker machine reels
made in accordance with the present invention may have any number of symbols and the
number of motor pulses associated with each symbol may be adjusted in relation to the height
40   of the symbol, with the total for one revolution of the reel still adding up to 200 pulses.   40
     The invention is of particular advantage in the United States where machines known as
"Keno" type machines have only a few symbols spaced around the periphery of their reels with
the remainder of the reels being blank. In such machines the symbol positions upon which the
reel stops, after it is rotated, may be unevenly spaced such that the stopping positions either
45   side of the symbol position are spaced further from the symbol position than are adjacent   45
stopping positions associated with blank portions of the reel. The present invention permits the
area occupied by the symbols on the Keno reel (typically "bar" symbols) to be two or three
times their present size with the intervening blanks correspondingly smaller.
     As it is usual to have several blank symbols joining each other between each bar symbol, and
50   as there is usually no dividing line between adjacent symbols, it would not be obvious, to   50
players of the machine that the different symbols were allocated different proportions of the
circumference of the reel and therefore the invention would not provide any visually disturbing
effect when applied to Keno machines. Further, any apparent abnormality in the display when
applied to normal poker machines would also be minimal.
55   Stepping motor driven poker machines using a 200 pulse per revolution motor, and equipped   55
with reels in accordance with the present invention, can be operated with 20, 21, 22, 23 or
even 26 symbol reels instead of the typical 25 symbol reels presently used.
     In some cases, where a large symbol is displayed in the position adjacent to the centre-line,
some proportion of that symbol may be obscured from view if the player does not adjust his
60   viewing position, however, this is not considered to be a significant disadvantage. Also, in those   60
cases where the symbol adjacent to the symbol of the centre-line is smaller than the nominal
symbol height, a small portion of the next symbol may also be visible.
     Embodiments of the invention will now be described, by way of example, with reference to
the accompanying drawings in which:
65   Fig. 1 illustrates a typical prior art machine having 25 equally sized symbol spaces;   65

Fig. 2 illustrates a portion of a 25 symbol reel strip, for use in a stepping motor driven machine, in which the spaces allocated to the symbols are not all equal;

Fig. 3 illustrates the portion of the symbol strip of Fig. 2 when moved down one symbol position relative to the viewing window;

5   Fig. 4 illustrates a portion of a symbol strip having 23 symbols;   5

Fig. 5 illustrates a portion of a flow chart indicating the manner in which control of the stepping motor would be implemented in a typical poker machine control programme.

Fig. 6 illustrates a portion of a 24 symbol reel strip for a non stepping motor driven machine, in which one symbol position ("JACKPOT") occupies twice the space of the remainder of the

10   symbols on the strip;   10

Fig. 7 illustrates a poker machine window having a reel in the first position which is fitted with a reel strip similar to that of Fig. 6;

Fig. 8 illustrates the window of Fig. 7 with the first reel "nudged" up by one half symbol to centre the double sized "JACKPOT" symbol;

15   Fig. 9 illustrates a portion of a flow chart for a machine using the reel strip of Fig. 6, showing   15
the programme sequence required to test for the occurrence of the double sized symbol on the centre line and to nudge the reel forward or backward one half card if necessary to centralize the double sized symbol; and

Fig. 10 illustrates a portion of a flow chart similar to that of Fig. 9, for a machine fitted with a

20   reel strip provided with a triple sized symbol, the flow chart showing the programme sequence   20
required to test for the triple sized symbol on the centre line and to nudge the symbol backward or forward by one card if necessary to centre the triple sized symbol.

Fig. 11 illustrates a poker machine incorporating the reels made in accordance with the present invention.

25   Referring now to Fig. 1, a typical reel 10 of a prior art stepper motor driven poker machine   25
having a 200 pulse per revolution stepper motor 11 is illustrated. The reel strip 12 of the prior art reel has 25 equally sized symbols 13 located about its periphery and the usual viewing area through which three adjacent symbols may be viewed is indicated. Markings 14 have been superimposed on the edge of the reel to indicate the 8 pulses which are applied to the motor to

30   move the reel by one symbol position or 1/25th of a revolution.   30

Referring now to Fig. 2, a reel strip 20 for a stepping motor machine according to the present invention is illustrated wherein not all of the symbol positions 13 are of equal size and in this example the symbol sizes are allocated as follows:

35   1 symbol @ 12 pulses = 12   35

2 symbols @   6 pulses = 12

<u>22</u> symbols @   8 pulses = <u>176</u>

40   25 symbols   200 pulses = 1 revolution   40

The reel strip is shown stopped in a position with the featured symbol 21, which has a height of 12 pulses located in the centre of the viewing area. In this case each of the adjoining symbols 22, 23 exactly fit into the viewing space.

45   In Fig. 3, the same reel strip is illustrated when stopped one symbol lower giving the worst   45
viewing condition. In this case one of the smallest symbols is exactly in the centre position, with the card above in full view and a fraction of the next card showing. the large card below centre is partly obscured unless the player moves his viewing position slightly.

The portion of a reel strip illustrated in Fig. 4 is devised to have a total of 23 symbols which

50   typically comprise: 50

1 symbol @ 12 pulses = 12

55   2 symbols @   6 pulses = 12   55

12 symbols @   8 pulses = 96

60   60

When this reel strip is moved upward by two symbols, to show the 12 pulse feature symbol 21 on the centre line, the display will be identical to that of Fig. 2.

Other reel combinations having a set of indicia which is not an integral sub-multiple of the number of pulses per revolution may be devised and some examples of these are set out below:

<u>21 Symbols</u>

```
      1 symbol   @  12 pulses  =  12
  5   2 symbols  @   6 pulses  =  12                                      5
      2 symbols  @   8 pulses  =  16
     16 symbols  @  10 pulses  = 160
 10  21 symbols                  200 pulses                              10
```

<u>22 Symbols</u>

```
      1 symbol   @  12 pulses  =  12
 15   2 symbols  @   6 pulses  =  12                                     15
      7 symbols  @   8 pulses  =  56
     12 symbols  @  10 pulses  = 120
 20  22 symbols                  200 pulses                              20
```

Typically in prior art poker machines employing stepping motors 11 to drive the reels 10, the stopping position of the reel is determined by randomly selecting the symbol number of the
25 symbol upon which the reel is to stop and then, having stepped the reel to the index position, 25 the reel is stepped on by a number of steps equal to the symbol number multiplied by the number of motor pulses per symbol. Clearly, this technique must be modified slightly in order to allow for the unequal symbol sizes of the reel of the present invention. However, a relatively simple modification to the typical control scheme is all that is required in order to accommodate
30 reels in accordance with the present invention. 30
Referring to Fig. 5, a portion of a flow chart describing the control programme of a poker machine, in which the dashed arrows represent portions of an existing poker machine control programme which are not described here. The block labelled 100 represents the random selection of a symbol upon which the particular reel is to be stopped, this being a pre-existing step
35 in the control programme of many poker machines. In poker machines using reels in accordance 35 with the present invention, an additional step 110 is inserted after the random selection step 100 of the prior art machine, the step 110 being used to look up a look up table which gives the reel stopping position for each symbol on the reel relative to the index position, in terms of the number of motor pulses required to step the reel from the index position to the selected
40 symbol. Finally, in the motor control portion of the poker machine control programme, the motor 40 is controlled to first provide a number of revolutions of the reel and then finally to step to the index position and execute a number of steps equal to the number looked up in the look up table. This programme step indicated as item 120 would replace the prior art procedure of stepping on from the index position by a number of steps equal to the symbol number multiplied
45 by the number of steps per symbol. 45
Referring to Figs. 6-10, conventional poker machines with the free spinning reels are generally provided with stopping mechanisms which allow the reels to be stopped at half card or full card intervals, where a card 30 is the standard division of the circumference of the reel and typically there are 25 cards to a reel. In such machines it is possible to implement the present invention
50 by using symbol areas which are multiples (eg. 2x or 3x) the standard card such as with the 50 "JACKPOT" symbol 31 of Figs. 6, 7 and 8.
When multiple card symbols 31 are used, however, it becomes necessary to test the reel when stopped, to determine whether a large card is in the centre line 32 of the window 33 and if so whether it is centred on the centre line 32. In the case of a double sized card 31, as
55 illustrated in Figs. 6, 7 and 8, it will be necessary to nudge the card forward or backward by 55 half a card, if the large symbol is not centred on the centre line 32. The technique of nudging is well known and understood and a variety of prior art machines have been produced in which the reels could be nudged forward or backward by one or more positions, for various purposes, and an explanation of the mechanism used will not be given here.
60 Referring to Fig. 9, centering of the double sized symbol of Figs. 6-8 is achieved by first 60 testing (200) to see if the reel has stopped on the first half of the double sized card, and if so causing the reel to be nudged upward (210) by one half card and then continuing (220) with the standard procedure. If the reel had not stopped on the first half of the double sized card, the programme would then test (230) to see if the reel had stopped on the second half of the
65 double sized card and if so the reel would be caused to be nudged downward (240) by half a 65

card, before continuing (220) with the standard procedure. Alternatively, if the reel had not
stopped on either half of the double sized card, the programme would simply continue (220)
with its standard procedure.

It is also possible to use reel strips using triple sized symbols (not shown), in which case it
5 will be necessary under some circumstances to nudge the reel forward or backward by a full   5
card position. Referring to Fig. 10, the flow chart for a symbol centering routine for a machine
with a triple sized symbol is illustrated, from which it will be seen that once the reel has
stopped spinning, the reel is tested (300) to determine whether it has stopped with the central
portion of the triple sized symbol on the centre line, in which case standard processing will be
10 continued (310). If the reel had not stopped on the central portion of the large symbol, a test is   10
performed (320) to determine whether the reel has stopped on the first portion of the large
symbol, in which case the reel will be nudged upward (330) by one card and standard process-
ing continued (310). Finally, if the reel has not stopped on the first or second cards of the large
symbol, a test is performed (340) to determine if the reel has stopped on the third card of the
15 large symbol in which case the reel will nudge downward (350) by one card before standard   15
processing is continued (310). Alternatively, if the reel has not stopped with any cards of the
triple sized symbol on the centre line, no nudging will take place and standard processing will
continue (310).

It will be recognised by persons skilled in the art that numerous variations and modifications
20 may be made to the invention as described above without departing from the spirit or scope of   20
the invention as broadly described.

CLAIMS
1. A reel for a poker machine display, said reel including a cylindrical peripheral surface to
25 which a plurality of indicia are applied, each of said indicia having a symbol space within which   25
the indicia is substantially centrally located, said symbol spaces occupying a proportion of the
circumference of the cylindrical surface which is different for different indicia on said surface.
2. The reel as claimed in claim 1 wherein a majority of the indicia on said reel have symbol
spaces of uniform size and the remainder of the indicia have a symbol space which differs from
30 the uniform size by an amount which is a fraction of the uniform size.   30
3. The reel as claimed in claim 1 wherein a majority of the indicia on said reel have symbol
spaces of uniform size and the remainder of the indicia have a symbol space which is an integer
multiple of the uniform size.
4. A poker machine including one or more reels as claimed in claim 1, 2 or 3, each of said
35 reels being driven by a stepping motor and each of the symbol spaces occupying a proportion   35
of the circumference of the reel which is a multiple of the incremental rotational step size of its
respective stepping motor.
5. The poker machine of claim 4 wherein a look up table is provided in which are stored the
number of motor steps corresponding to each symbol space on the reels, the look up table
40 being used to calculate the correct number of steps required to stop a reel with any given   40
symbol centered on a display centre line.
6. A poker machine including one or more reels as claimed in claim 1 or 3, the machine being
provided with nudging means for nudging a reel forward or backward by an amount necessary
to centre one of said remainder of the indicia on a display centre line when the respective indicia
45 has come to rest on said centre line without being centered thereon.   45